



文字高98mm(4inch) 7セグメントLED数字表示器 (アノードコモン)

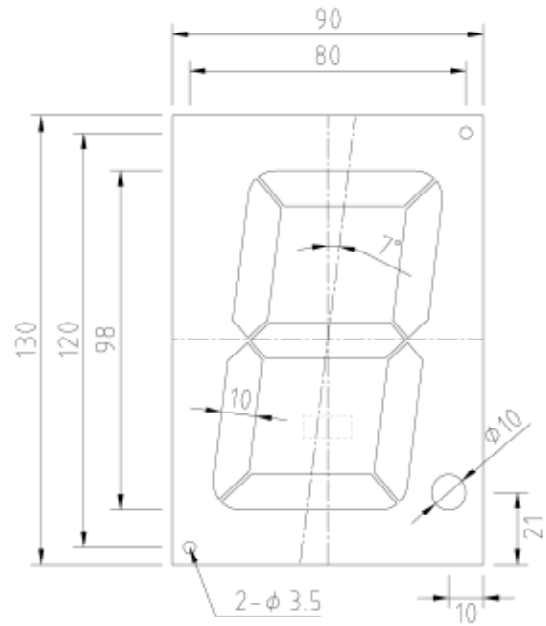


JNR1412A-3 (屋内用)

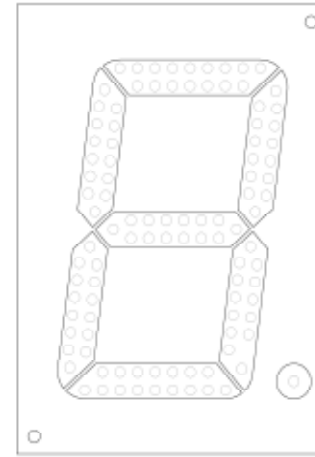

JNR1412O-3(屋外用)

電源電圧	DC24V±5V
最大消費電流	1 セグメント : 80mA
	D.P : 20mA
保存温度	-20~70℃
動作温度	-10~50℃
湿度	10~85%

正面図

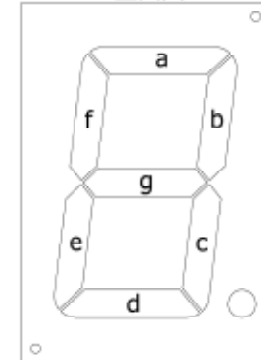

背面図




omron MIL系フラットケーブルコネクタ
ボックスタイププラグ XG4C-1031



- ① : Grand
- ② : セグメントd
- ③ : COM
- ④ : セグメントe
- ⑤ : セグメントa
- ⑥ : セグメントf
- ⑦ : セグメントb
- ⑧ : セグメントg
- ⑨ : セグメントc
- ⑩ : D.P.

制限抵抗は必要ありません



JNR1412A-3



JNA1412A-3



JNG1412A-3



JNB1412A-3



JNW1412A-3



JNY1412A-3



JNR1412O-3



JNA1412O-3



JNG1412O-3



JNB1412O-3



JNW1412O-3



JNY1412O-3