



文字高100mm 7セグメントLED数字表示器 (アノードコモン)

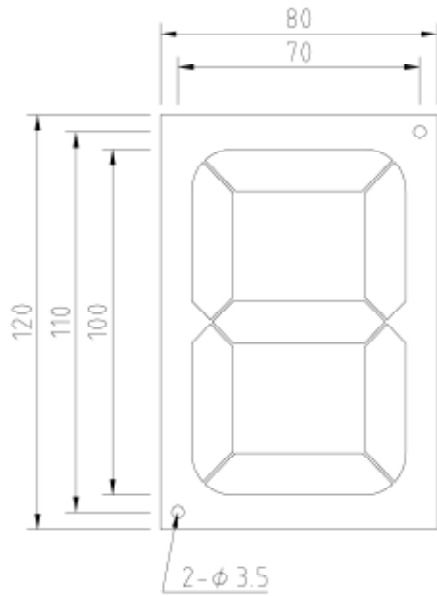


JNR1M10011A-3(屋内用)

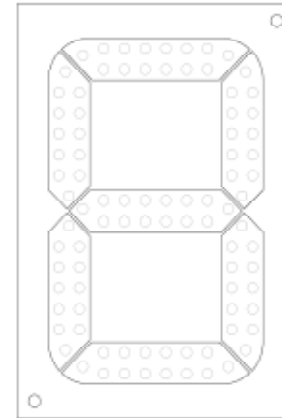


JNR1M10011O-3(屋外用)

電源電圧	DC24V±5V
最大消費電流	1セグメント: 60mA
	D.P: 無し
保存温度	-20~70℃
動作温度	-10~50℃
湿度	10~85%

正面図

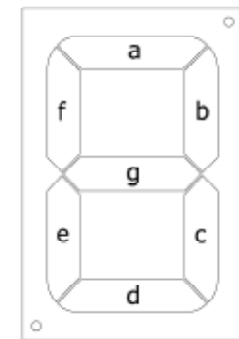


背面図

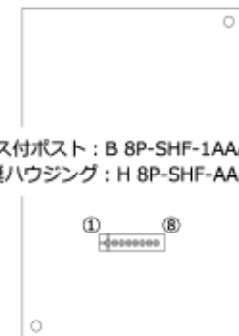

ベース付ポスト: B 8P-SHF-1AAA(JST)  
 推奨ハウジング: H 8P-SHF-AA(JST)

- ①: COM
- ②: セグメントg
- ③: セグメントf
- ④: セグメントe
- ⑤: セグメントd
- ⑥: セグメントc
- ⑦: セグメントb
- ⑧: セグメントa


制限抵抗は必要ありません



JNR1M10011A-3



JNA1M10011A-3



JNG1M10011A-3




JNB1M10011A-3



JNW1M10011A-3



JNY1M10011A-3



JNR1M10011O-3



JNA1M10011O-3



JNG1M10011O-3



JNB1M10011O-3



JNW1M10011O-3



JNY1M10011O-3