

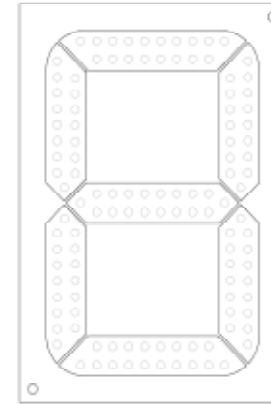


文字高130mm 7セグメントLED数字表示器 (アノードコモン)

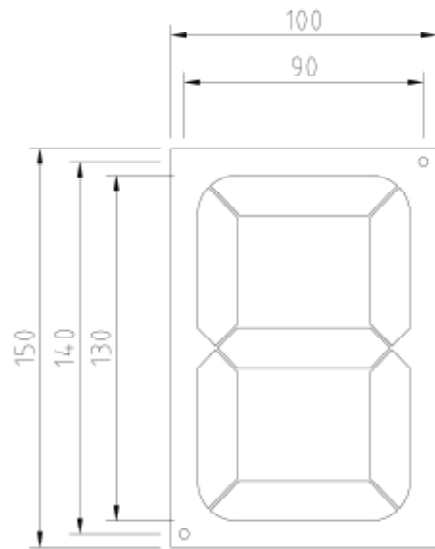


電源電圧	DC24V±5V
最大消費電流	1セグメント：80mA
	D.P：無し
保存温度	-20～70℃
動作温度	-10～50℃
湿度	10～85%

正面図



背面図




ベース付ポスト：B 8P-SHF-1AAA(JST)
 推奨ハウジング：H 8P-SHF-AA(JST)

- ①：COM
- ②：セグメントg
- ③：セグメントf
- ④：セグメントe
- ⑤：セグメントd
- ⑥：セグメントc
- ⑦：セグメントb
- ⑧：セグメントa

制限抵抗は必要ありません

JNR1M13011A-3(屋内用)

JNR1M13011O-3(屋外用)



JNR1M13011A-3



JNA1M13011A-3



JNG1M13011A-3




JNB1M13011A-3




JNW1M13011A-3




JNY1M13011A-3




JNR1M13011O-3



JNA1M13011O-3




JNG1M13011O-3



JNB1M13011O-3



JNW1M13011O-3



JNY1M13011O-3