
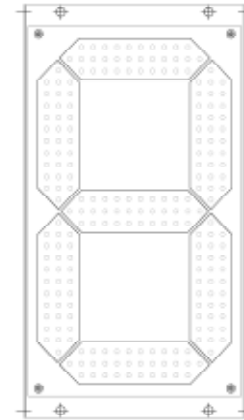


文字高234mm(9inch) 7セグメントLED数字表示器 (アノードコモン)

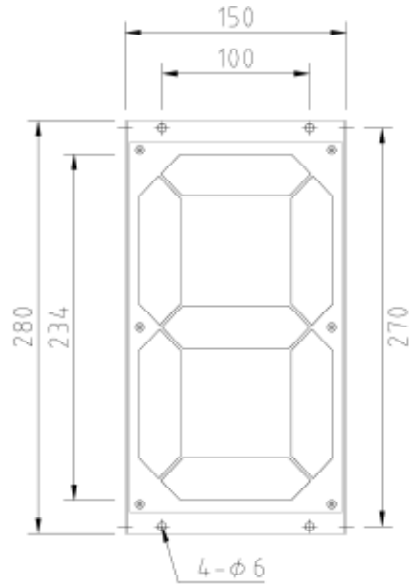


電源電圧	DC24V±5V
最大消費電流	1セグメント : 160mA
	D.P : 無し
保存温度	-20~70℃
動作温度	-10~50℃
湿度	10~85%

JNR1911A-3(屋内用)

JNR1911O-3(屋外用)

正面図

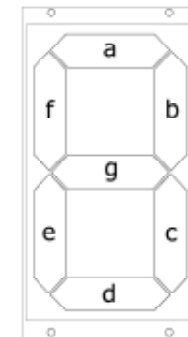


背面図

omron MIL系フラットケーブルコネクタ
ボックスタイププラグ XG4C-1031



- ① : Grand
- ② : セグメントd
- ③ : COM
- ④ : セグメントe
- ⑤ : セグメントa
- ⑥ : セグメントf
- ⑦ : セグメントb
- ⑧ : セグメントg
- ⑨ : セグメントc
- ⑩ : D.P.

制限抵抗は必要ありません



JNR1911A-3



JNA1911A-3



JNG1911A-3



JNB1911A-3




JNW1911A-3



JNY1911A-3




JNR1911O-3



JNA1911O-3




JNG1911O-3



JNB1911O-3



JNW1911O-3



JNY1911O-3