



文字高203mm(8inch) 7セグメントLED数字表示器 (アノードコモン)

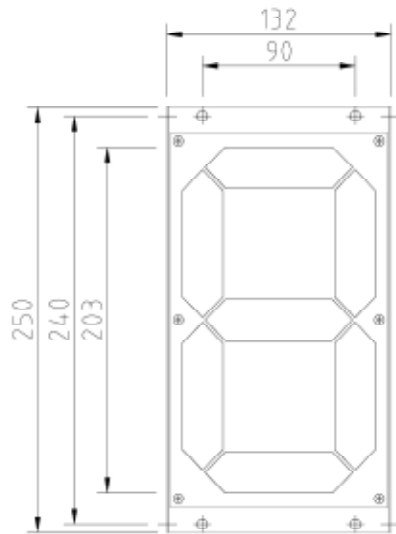


JNR1811A-3(屋内用)

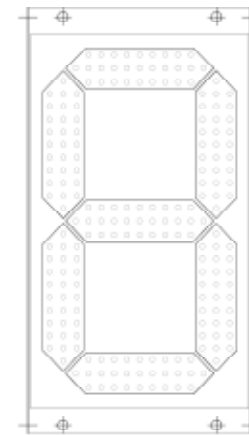

JNR1811O-3(屋外用)

電源電圧	DC24V±5V
最大消費電流	1セグメント: 160mA
	D.P: 無し
保存温度	-20~70℃
動作温度	-10~50℃
湿度	10~85%

正面図




背面図



- ①: Grand
- ②: セグメントd
- ③: COM
- ④: セグメントe
- ⑤: セグメントa
- ⑥: セグメントf
- ⑦: セグメントb
- ⑧: セグメントg
- ⑨: セグメントc
- ⊕: NC

制限抵抗は必要ありません



JNR1811A-3



JNA1811A-3



JNG1811A-3



JNB1811A-3



JNW1811A-3



JNY1811A-3



JNR1811O-3



JNA1811O-3



JNG1811O-3



JNB1811O-3



JNW1811O-3



JNY1811O-3